




GEM Laser Cutting Machine

GEMQG-4020F-1000

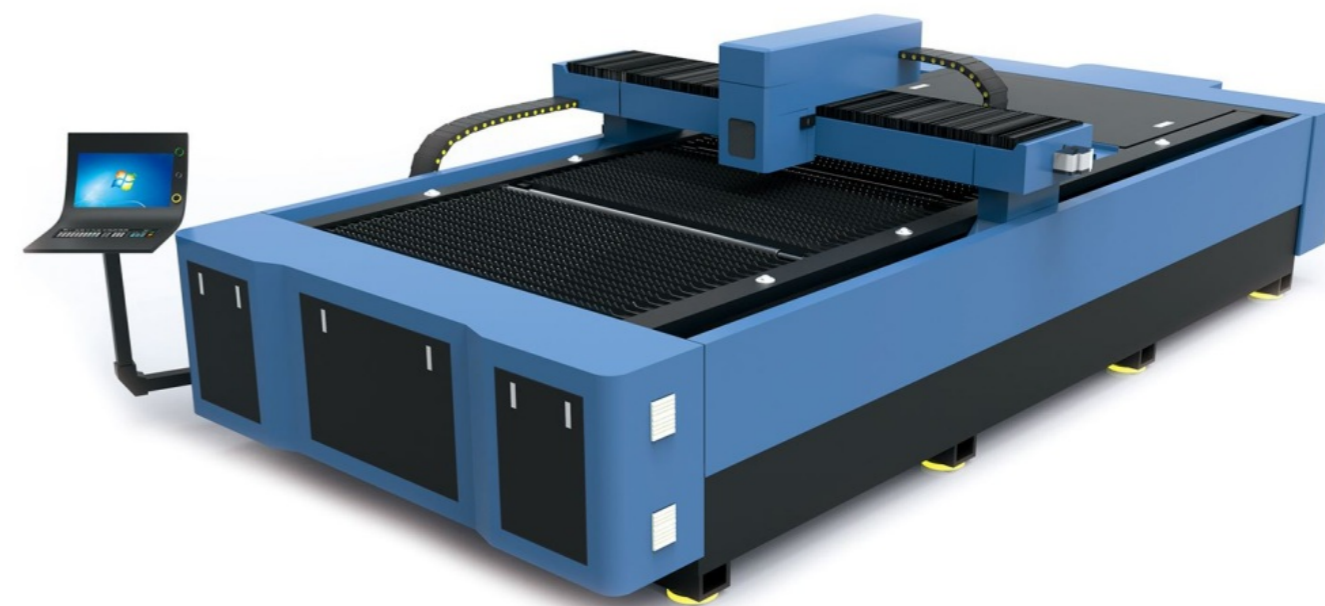

GEM LASER LIMITED

A Legend Laser machine Manufacture & Solutions


Add . : No.442 ,Wuluo Road,Wuhan,430061 P.R.China .

Tel. : +86-27-84793136

Fax : +86-27-84793136

E-mail: sales@gem-lasers.com

Web : www.gem-lasers.com

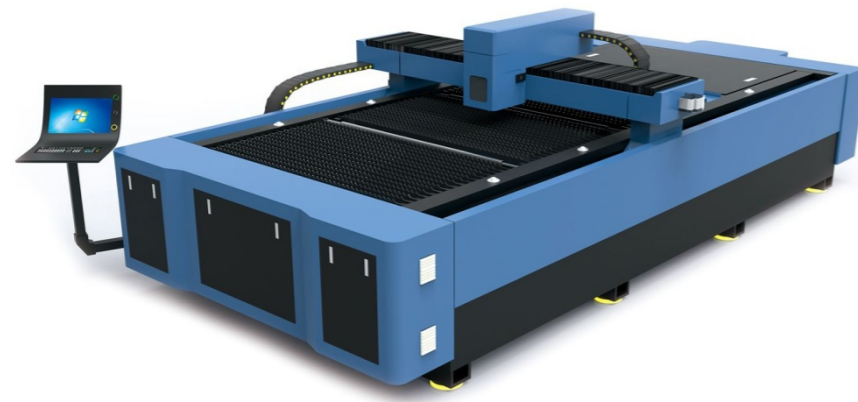

OVERVIEW

Laser cutting equipment can be used to cut stainless steel below 16mm. In the laser beam, oxygen can be cut from 8 to 10mm stainless steel, but after oxygen cutting, a thin oxide film will be formed on the cutting surface. The maximum thickness of the cutting can be increased to 16mm, but the size of the cutting parts is larger.

FEATURES

1. The machine adopts the movable Gantry structure, high precision wire rod and linear guide rail, the transmission is stable and the precision is high.
2. And mobile bed beam are welded after annealing, rough machining, and then the vibration aging treatment can completely eliminate the stress of welding and machining, good rigidity, high precision, can be kept for long time using deformation.
3. X, Y and Z shaft adopt imported servo motor, high precision, high speed, big torque, big inertia, stable and durable performance. It guarantees the high speed and acceleration of the whole machine.
4. adopt CPY based optical fiber laser cutting machine special CNC system based on Windows operating system. It integrates many special function modules of laser cutting control. It has powerful function, good man-machine interface and simple operation.
5. the cutting head uses the fiber laser special cutting head produced by the Lasermech and the capacitive sensor. The sensing precision is high, the reaction is sensitive, and the performance is most stable and reliable.
6. high-precision electronic control proportional valve, accurate control of cutting auxiliary gas pressure, so as to achieve the best cutting effect.


SPECIFICATIONS

Model	GEMQG-4020F-1000
Laser wavelength	1070nm
Maximum average power of laser output	1000W
Laser repetition frequency	CW
Energy instability	≤2%
Minimum cutting line width	0.2mm (under 0.4mm material)
Maximum cutting speed	≤20m/min(due to material)
Maximum cutting thickness	≤10mm (Carbon steel) (oxygen) ; ≤5mm(Stainless) (nitrogen)
Continuous working time	≥20hours
Maximum cut width (double platform switching)	Y;4000mm, X:2500mm, Z:120mm
Mechanical accuracy of table	±0.05mm/m
X, Y and Z repeated positioning accuracy	±0.05mm
Power Supply	Three-phase five wire AC 380V + 5%, 50Hz + 1%
Table Loading	1000KG
Equipment weight (estimated)	3500KG

Device configuration list (Standard, Option)

Item	Subsystem	Component	Model	Quantity	Mark
1	Laser marking head	High speed scanning galvanometer	Light Φ10mm	1pcs	China
		Galvanometer drive card		1pcs	
		Scanning field mirror	f=160mm	1pcs	China/Import
		Beam expander	10X	1pcs	China/Import
2	Laser	Green Laser	pulse-532-005	1set	China
3	Laser marking machine cabinet	Cabinet		1set	GEM
4	Computer&software	Computer	Desktop	1set	Lenovo
		Software	Software	1set	GEM
6	Workbench	Precision workstation		1set	GEM
7	Seat				

Laser Marked Samples

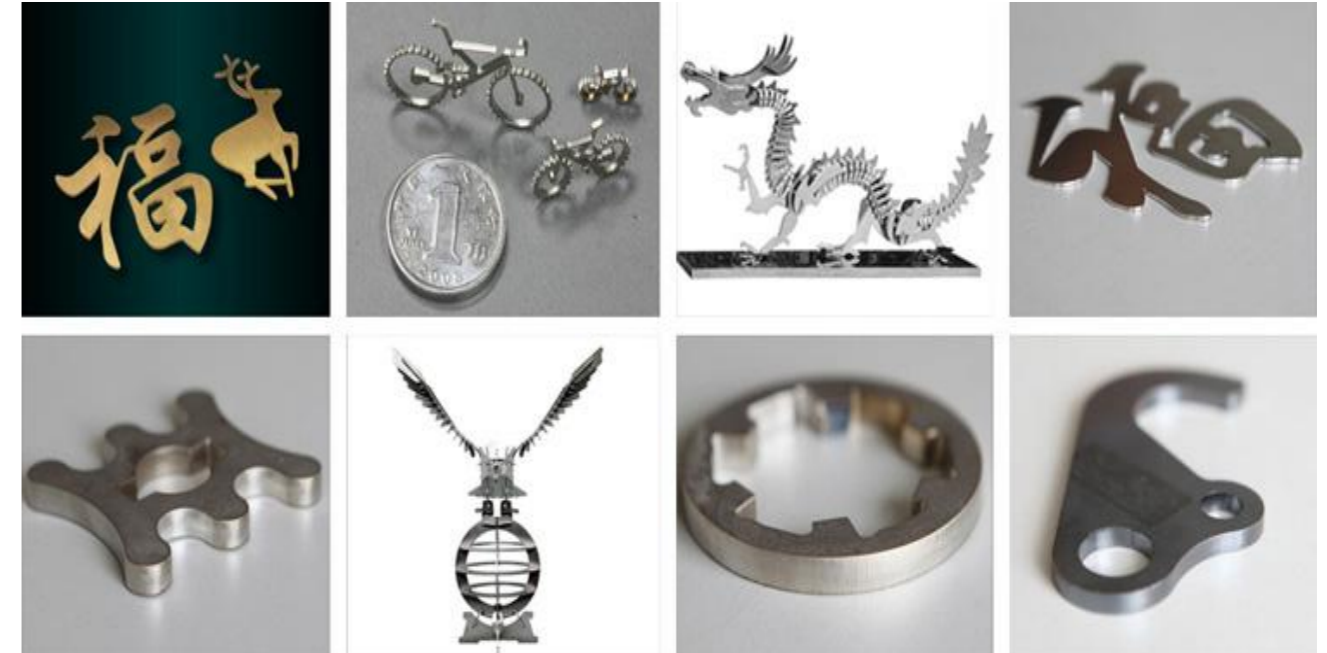

Applications

Applications: metal cutting, electrical switch manufacturing, elevator manufacturing, household appliances manufacturing, kitchenware manufacturing, tool processing, and other machinery manufacturing processing industry.

Applicable materials: mainly used for cutting a variety of thin sheet metal cutting, high quality carbon steel 0.5~6mm, 0.5~5mm stainless steel plate, but also can cut Aluminum Alloy plate, galvanized plate, electrolytic plate, silicon steel, titanium alloy, aluminium zinc plate, thin brass sheet and other metal materials.